



|          |          |              |                       |          |        |     |
|----------|----------|--------------|-----------------------|----------|--------|-----|
| DATE     | 2013.8.2 | TYPE         | MD COIL SPECIFICATION |          | PAGE   | 1/1 |
| CUSTOMER |          | DESCRIPTION  | JHF1547               | PART NO. | 10T3R5 |     |
|          |          | CUSTOMER NO. |                       | REF. NO. |        |     |

1. PHYSICAL DIMENSION (UNIT: mm)

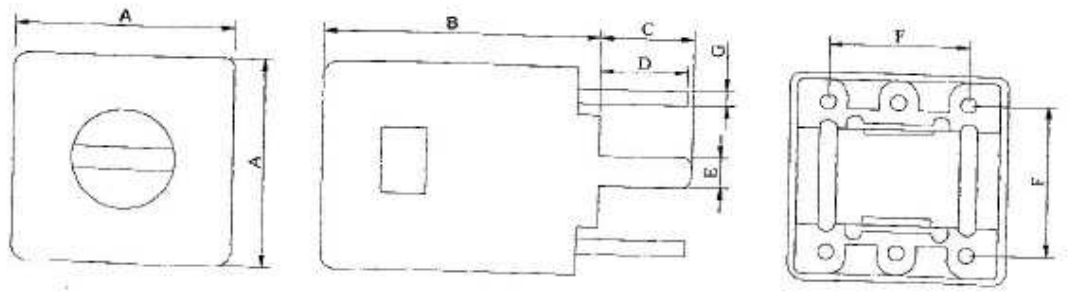

2. SCHEMATIC:



URNS

(4-6)6TS,(3-2)10TS,(2-1)10TS

NOTE: 产品使用环保材料作业

|                        |           |             |
|------------------------|-----------|-------------|
| A:10.5 MAX             | B:13.5MAX |             |
| C:4.0±0.5              | D:3.5±0.5 |             |
| E:1.5±0.2              | F:7.0±0.5 | G:φ0.7±0.05 |
| L(or C): 220pF (ext.)  |           |             |
| Q: 60 min              |           |             |
| 测试仪器: HP Q meter 4342A |           |             |
| 测试频率: 3.5MHz±3% min    |           |             |

| NO. | MATERIAL | SPECIFICATION | DATE | REPAIR LIST | REPAIR BY |
|-----|----------|---------------|------|-------------|-----------|
| 1   | WIRE     | 2UEW-φ0.08    | 1    |             |           |
| 2   | COLOR    | BLACK         | 2    |             |           |
| 3   |          |               | 3    |             |           |
| 4   |          |               | 4    |             |           |
| 5   |          |               | 5    |             |           |

零件名稱: JHF1549 (10T3R5)      規格書: JIS B 3000  
 製造廠: 富士電機      數量: 10 pcs      日期: 102.8.2

| 項目  | F max    | F min    | Q value |
|-----|----------|----------|---------|
| 標稱值 | 3.5 MHz  | 3.5 MHz  | 60      |
| 公差  | +3% min  | -3% max  | Min     |
| 1   | 3.97 MHz | 2.84 MHz | 95      |
| 2   | 4.0      | 2.88     | 98      |
| 3   | 3.99     | 2.87     | 98      |
| 4   | 4.0      | 2.87     | 96      |
| 5   | 3.96     | 2.83     | 92      |
| 6   | 3.98     | 2.85     | 95      |
| 7   | 3.99     | 2.85     | 95      |
| 8   | 3.99     | 2.86     | 95      |
| 9   | 3.97     | 2.83     | 97      |
| 10  | 3.98     | 2.85     | 94      |
| X   |          |          |         |
| R   |          |          |         |

備註: SPECIFICATION: F: 3.5 MHz  $\pm$  3% min  
 L(EXT): 220 pF (ext)  
 Q: 60 min  
 P/N: JHF1549 (10T3R5)

檢定儀器: HP Q meter 4342A



確認      品保      檢查      判定