



DATE	2014.1.9	TYPE	MD COIL SPECIFICATION		PAGE	1 / 1
CUSTOMER		DESCRIPTION	JHF1630	PART NO.	7T14	
		CUSTOMER NO.		REF. NO.		

1. PHYSICAL DIMENSION (UNIT: mm)

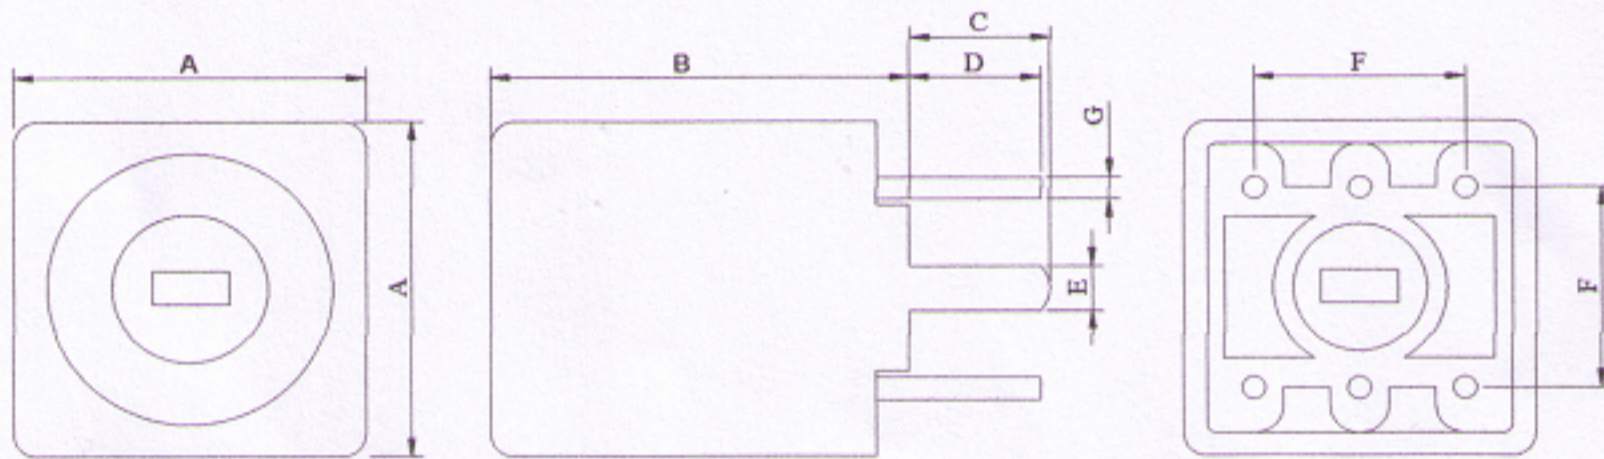

2. SCHEMATIC:

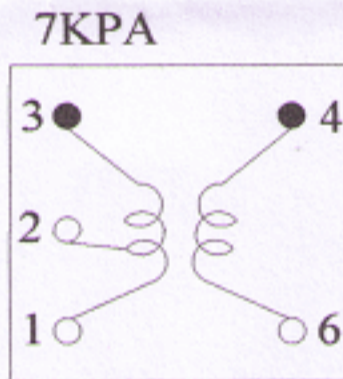

TURNS

(4-6)4TS, (3-2)6TS, (2-1)6TS

NOTE: 产品使用环保材料作业

A: 7.5 MAX	B: 12.5 MAX	
C: 3.5±0.3	D: 3.4±0.3	
E: 1.0±0.2	F: 4.5±0.3	G: φ0.5±0.05
L(OR C): 70 pF(ext.)		
Q: 50 MIN		
测试仪器: HP Q meter 4342A		
测试频率: 14MHz±3%min		

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.12	1		
2	COLOR	BLACK	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.	

出貨檢驗記錄表

客戶名稱		品名規格	JHF1630 (7T14)	訂單編號	樣品
抽樣標準		交貨數	10 pcs	日期	103.1.9
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	140MHz		14 MHz		50
TOLERANCE	+3% min		-3% max.		Min
1	27.8 MHz		16.3 MHz		57
2	27.8		16.4		55
3	27.7		16.2		58
4	27.8		16.4		57
5	27.6		16.1		57
6	27.9		16.4		57
7	27.8		16.3		56
8	27.8		16.3		57
9	27.9		16.4		58
10	27.7		16.2		56
X					
R					
備註	SPECIFICATION: F: 14MHz ± 3% min L(OR C): 70 pF (ext) Q: 50 min P/N: JHF1630 (7T14)			TEST INSTRUMENT: HP Q meter 4742A	