



DATE	2013.6.20	TYPE	MD COIL SPECIFICATION		PAGE	1/1
CUSTOMER		DESCRIPTION	10T7	PART NO.		
		CUSTOMER NO.	JHF1228	REF. NO.		

1. PHYSICAL DIMENSION (UNIT: mm)

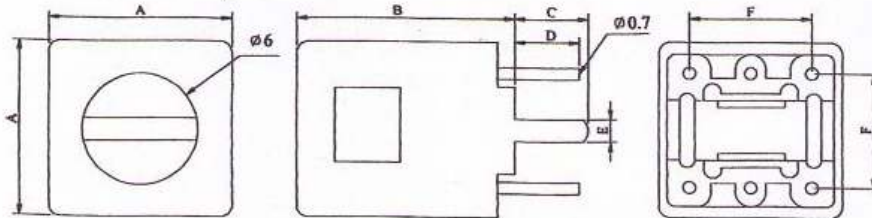

2. SCHEMATIC:



TURNS

(4-6)5TS,(3-2)7TS,(2-1)7TS

NOTE: 产品使用环保材料作业

A: 10.5 MAX B: 13.5MAX

C: 4.0±0.3 D: 3.5±0.3

E: 1.5±0.2 F: 7.0±0.3

L(or C): 120pF(ext.)

Q: 50 MIN

测试仪器: HP Q meter 4342A

测试频率: 7MHz±3% min

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.10	1		
2	COLOR	BLACK	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.	
---------	-------	-------	---------	------------------	-----------	--

出貨檢驗記錄表

客戶名稱		品名規格	JHF1228 (10T?)	訂單編號	
抽樣標準		交貨數	10 PCS	日期	102.6.20
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	7MHz		7MHz		50
TOLERANCE	+3% min		-3% max		Min
1	7.6 MHz		5.6 MHz		72
2	7.61		5.61		72
3	7.59		5.59		73
4	7.59		5.59		75
5	7.60		5.61		74
6	7.58		5.58		74
7	7.60		5.59		75
8	7.60		5.61		72
9	7.61		5.61		75
10	7.59		5.59		73
X					
R					
備註	SPECIFICATION: F = 7MHz ± 3% min L(0°C) = 120 pF (ext) Q = 50 min P/N = JHF1228 (10T?)			TEST INSTRUMENT = HP G meter 4342A	
確 認		品 保		檢 查	判 定

