



DATE	2013.6.20	TYPE	MD COIL SPECIFICATION		PAGE	1/1
CUSTOMER		DESCRIPTION	7T1	PART NO.		
		CUSTOMER NO.	JHF1529	REF. NO.		

1. PHYSICAL DIMENSION (UNIT: mm)

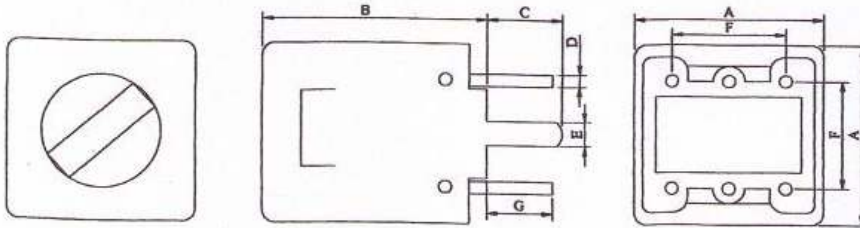

2. SCHEMATIC:



TURNS

(4-6)12TS,(3-2)19TS,(2-1)19TS

NOTE: 产品使用环保材料作业

A: 7.5±0.3 B: 12.5MAX

C: 3.5±0.3 D: 0.5±0.05

E: 1.0±0.2 F: 4.5±0.3

G: 2.8±0.3

L(or C): 820pF(ext.)

Q: 60 MIN


测试仪器: HP Q meter 4342A

测试频率: 1MHz±3% min

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.08	1		
2	COLOR	BLACK	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.	
张明辉	何志高	何志高	何志高			

出貨檢驗記錄表

客戶名稱		品名規格	JHF1529(9T1)	訂單編號	
抽樣標準		交貨數	10 pcs	日期	102.6.20
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	1 MHz		1 MHz		Min
TOLERANCE	+3% min		-3% max		65
1	1.2 MHz		0.91 MHz		72
2	1.18		0.87		74
3	1.22		0.91		68
4	1.19		0.88		70
5	1.22		0.92		72
6	1.22		0.92		69
7	1.21		0.90		65
8	1.21		0.91		65
9	1.18		0.88		72
10	1.19		0.90		70
X					
R					
備註	SPECIFICATION: F = 1 MHz \pm 3% min L(orc) = 820 pF (ext) Q = 60 min P/N = JHF1529 (9T1)				
	TEST INSTRUMENT = HPQ meter 4342A				
確 認		品 保		檢 查	
					判 定