



DATE	2013.6.20	TYPE	MD COIL SPECIFICATION		PAGE	1/1
CUSTOMER		DESCRIPTION	7T3R5	PART NO.		
		CUSTOMER NO.	JHF1530	REF. NO.		

1. PHYSICAL DIMENSION (UNIT: mm)

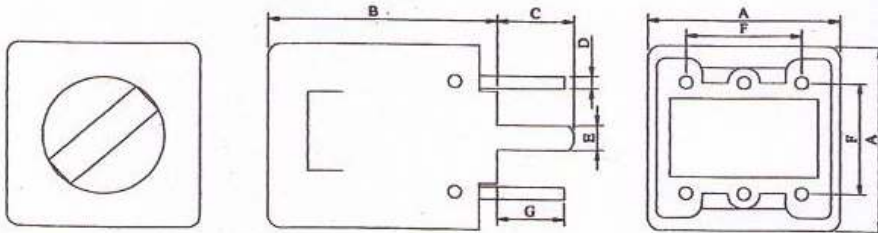

2. SCHEMATIC:



URNS

(4-6)6TS, (3-2)10TS, (2-1)10TS

NOTE: 产品使用环保材料作业

A: 7.5±0.3 B: 12.5MAX

C: 3.5±0.3 D: 0.5±0.05

E: 1.0±0.2 F: 4.5±0.3

G: 2.8±0.3

L(or C): 220pF(ext.)

Q: 60 MIN

测试仪器: HP Q meter 4342A

测试频率: 3.5MHz±3% min

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.08	1		
2	COLOR	BLACK	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.
---------	-------	-------	---------	------------------	-----------

出貨檢驗記錄表

客戶名稱		品名規格	JHF1530(7T3R5)	訂單編號	
抽樣標準		交貨數	10 pcs	日期	102.6.20
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	3.5 MHz		3.5 MHz		Min
TOLERANCE	+3% min		-3% max		85
1	3.90 MHz		2.95 MHz		82
2	3.92		2.97		86
3	3.92		2.96		86
4	3.91		2.96		82
5	3.92		2.97		82
6	3.91		2.96		84
7	3.90		2.95		85
8	3.90		2.94		85
9	3.91		2.96		84
10	3.89		2.94		82
X					
R					
備註	SPECIFICATION: F = 3.5 MHz \pm 3% min L(orc) = 220 pF (ext) Q = 60 min P/N = JHF1530 (7T3R5)				
	TEST INSTRUMENT = HPQ meter 4342A				
確 認		品 保		檢 查	判 定

