



DATE	2014.8.28	TYPE	MD COIL SPECIFICATION	PAGE	1/1
CUSTOMER		DESCRIPTION	JHF1721	PART NO.	(B)
		CUSTOMER NO.		REF. NO.	

1. PHYSICAL DIMENSION (UNIT: mm)

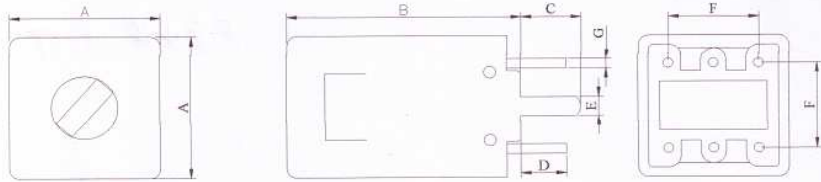

2. SCHEMATIC:
7EAI



URNS

(4-6)7TS,(3-2)47TS,(2-1)109TS

NOTE: 产品使用环保材料作业

A:7.5±0.3	B:12.5MAX
C:3.5±0.3	D:2.8±0.3
E:1.0±0.2	F:4.5±0.5
G:φ0.5±0.05	
L(OR C): 180 pF(1-3)	
Q: 70 MIN	
测试仪器: HP Q meter 4342A	
测试频率: 455KHz±3%min	

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.07	1		
2	COLOR	WHITE	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.

出貨檢驗記錄表

客戶名稱		品名規格	JHF1921	訂單編號	样品
抽樣標準	10 pcs	交貨數量	10 pcs	日期	103.8.21
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	455 KHz		455 KHz		70
TOLERANCE	+3% min		-3% max		min
1	570 KHz		360 KHz		105
2	569		358		110
3	570		360		105
4	568		358		105
5	566		357		105
6	568		358		110
7	567		358		110
8	569		359		110
9	570		360		105
10	566		356		115
X					
備 註	SPECIFICATION:		TEST INSTRUMENT		
	F: 455 KHz ± 3% min L(or C): 180 pF (1-3) Q: 70 min P/N: JHF1921		HP Q meter 4342A		
確 認	品 保	檢 查		判 定	