



DATE	2014.8.28	TYPE	MD COIL SPECIFICATION	PAGE	1/1
CUSTOMER		DESCRIPTION	JHF1720	PART NO.	(C)
		CUSTOMER NO.		REF. NO.	

1. PHYSICAL DIMENSION (UNIT: mm)

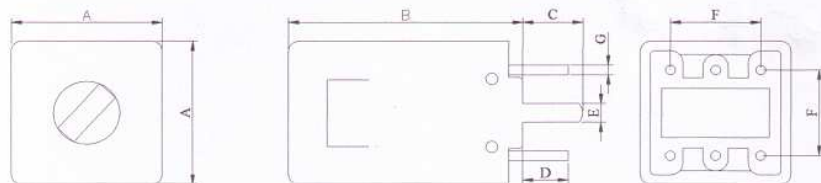

2. SCHEMATIC:  
7EAI



URNS

(4-6)37TS,(3-2)45TS,(2-1)111TS

NOTE: 产品使用环保材料作业

A:7.5 ±0.3	B:12.5MAX
C:3.5±0.3	D:2.8±0.3
E:1.0±0.2	F:4.5±0.5
G:φ0.5±0.05	
L(OR C): 180 pF(1-3)	
Q: 70 MIN	
测试仪器: HP Q meter 4342A	
测试频率: 455KHz±3%min	

NO.	MATERIAL	SPECIFICATION	DATE	REPAIR LIST	REPAIR BY
1	WIRE	2UEW-φ0.06	1		
2	COLOR	BLACK	2		
3			3		
4			4		
5			5		

DRAWING	CHECK	CHECK	APPROVE	CUSTOMER APPROVE	ISSUE NO.

出貨檢驗記錄表

客戶名稱		品名規格	JHF1720	訂單編號	樣品
抽樣標準	10 pcs	交貨數量	10 pcs	日期	103. 8. 21
檢 驗 內 容					
ITEM	F max		F min		Q value
NOMINAL	455KHz		455KHz		70
TOLERANCE	+3% min		-3% max		min
1	550KHz		350 KHz		90
2	545		346		100
3	548		348		95
4	551		350		95
5	549		350		95
6	542		343		90
7	552		351		105
8	550		350		100
9	546		346		95
10	549		348		95
X					
備註	SPECIFICATION:		TEST INSTRUMENT		
	F: 455KHz ± 3% min		HP Q. meter 4342A		
	L(or C): 180 pF (1-3)				
	Q: 70 min				
	P/N: JHF1720				
確認	品保	檢查	判定		